

ELECTRIC ACTUATOR BUTTERFLY VALVE

All valves can be direct mounted with motorized Electric actuators and accessories for complete on-off automation or modulating control.

Standard Design Features:-

- Compact, Light Weight and Robust Design.
- IP68 protection.
- Quarter turn (90°) operation with mechanical travel stops.
- Torque range: 20 NM to 6000 NM.
- Type 4X weatherproof aluminium alloy enclosure.
- Highly visual dome style valve position indicator.
- Space heater in built in all models.
- ISO5211 multi flange valve mounting
- Thermostatically controlled space heater – included as standard in all models.
- Two auxiliary limit switches included with on-off units – included as standard in all models (potentiometer feedback).
- Approvals - CSA & CE.
- High duty cycle.
- Ambient temperature -20° ~ +80° C.
- Smart modulation module, anti-interference, ratio board protection.
- Manual override with clutch type handwheel in all models.

Conformity to Standard & Codes:

Design Standard:

API 609, BS 5155, ISO 5211

Face to Face Dimension:

API 609

End Detail:

ASME B16.5 (Suitable for insertion between PN10/ PN16/ #150 BS-10 Table D/ E Flanges)

Valve Testing:


API 598



UPC INSTRUMENTS PVT.LTD.

AN ISO 9001:2015, 14001-2015 CE & TÜV SÜD CERTIFIED COMPANY

ELECTRIC ACTUATOR BUTTERFLY VALVE

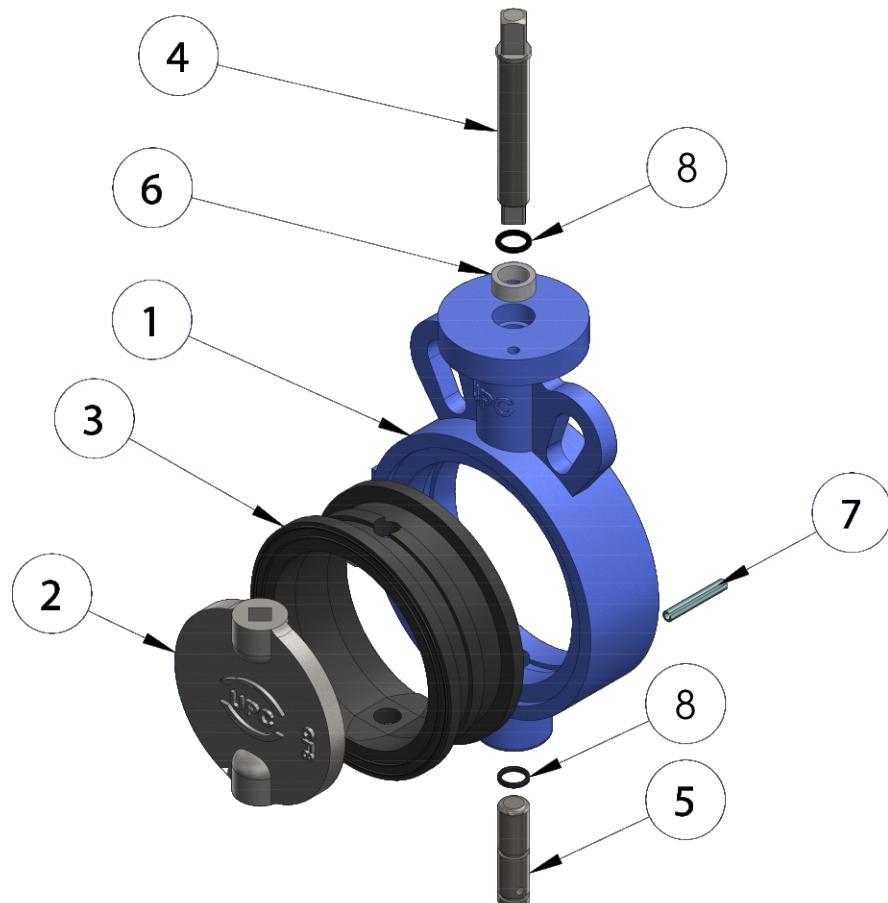

PART LIST

S. NO.	PART NAME	MATERIAL	SPECIFICATION	QTY.
1.	BODY	CAST IRON / DUCTILE IRON	IS210 GR. FG200/220 / ASTM A536 GR. 65-45-12/60-40-18	1
2.	DISC	DUCTILE IRON / STAINLESS STEEL	ASTM A536 GR. 65-45-12/60-40-18 / ASTM A351 GR.CF8/CF8M	1
3.	RUBBER SUPPORTED BACK-UP RING	PLASTIC + RUBBER	SILICON + EPDM	1
4.	MAIN STEM	STAINLESS STEEL	ASTM A 276 GR. 410/304/316	1
5.	PIVOT STEM	STAINLESS STEEL	ASTM A 276 GR. 410/304/316	1
6.	SELF LUBRICATED BUSH	STEEL + BRNZ + PTFE	CARBON STEEL BACKING + SINTERED BRONZE & PTFE	2
7.	DOWEL PIN	CARBON STEEL	ASTM A105	1
8.	O-RING	NBR (BUNA-N)	NBR (BUNA-N)	2

Note: 1. Special Seat Material like PTFE lined EPDM/NBR, Body Moulded Fixed Seat, Silicon, Viton and UHMWPE Available on Demand.
 2. Special Coatings available on Demand.
 3. Contact Technical Team for Any Kind of Special Material.

ELECTRIC ACTUATOR BUTTERFLY VALVE



DIMENSIONS

SIZE	INCH	A	B	C	D	E	F	G	H	I	J
DN40	1 1/2"	34	38	70	113.3	67	50	11.8	21	8	2
DN50	2"	43	50	77	123	67	50	11.8	21	8	2
DN65	2 1/2"	48.3	63	86	132	68	50	14	20	8	2
DN80	3"	46	78	93	143	69	50	14	20	8	2
DN100	4"	52	98	104	152	68.5	50	14	21	8	2
DN125	5"	54	122	119	170	85	68	14	21	8	2
DN150	6"	57	143	138	186	86	69	14	20	8	2
DN200	8"	64	196	168	224	86	69	17	21	8	2
DN250	10"	68	251	202	269	125	102	20	21	11.5	4
DN300	12"	78	301	234	298	125	102	20	21	11.5	4
DN350	14"	78	340	275	330	175	140	24	24	17.5	4
DN400	16"	102	391	303	358	175	140	36	38	17.5	4
DN450	18"	114	442	356	403	175	140	36	38	17.5	4
DN500	20"	127	486	382	435	210	165	46	48	21.5	4
DN600	24"	154	585	440	510	210	165	55	57	21.5	4
DN700	28"	165	680	490	560	300	254	55	57	17.5	8
DN750	30"	165	699	540	615	300	254	55	57	17.5	8
DN900	36"	200	850	630	705	300	254	55	57	17.5	8

*All dimensions are in mm unless and otherwise specified.

ELECTRIC ACTUATOR BUTTERFLY VALVE

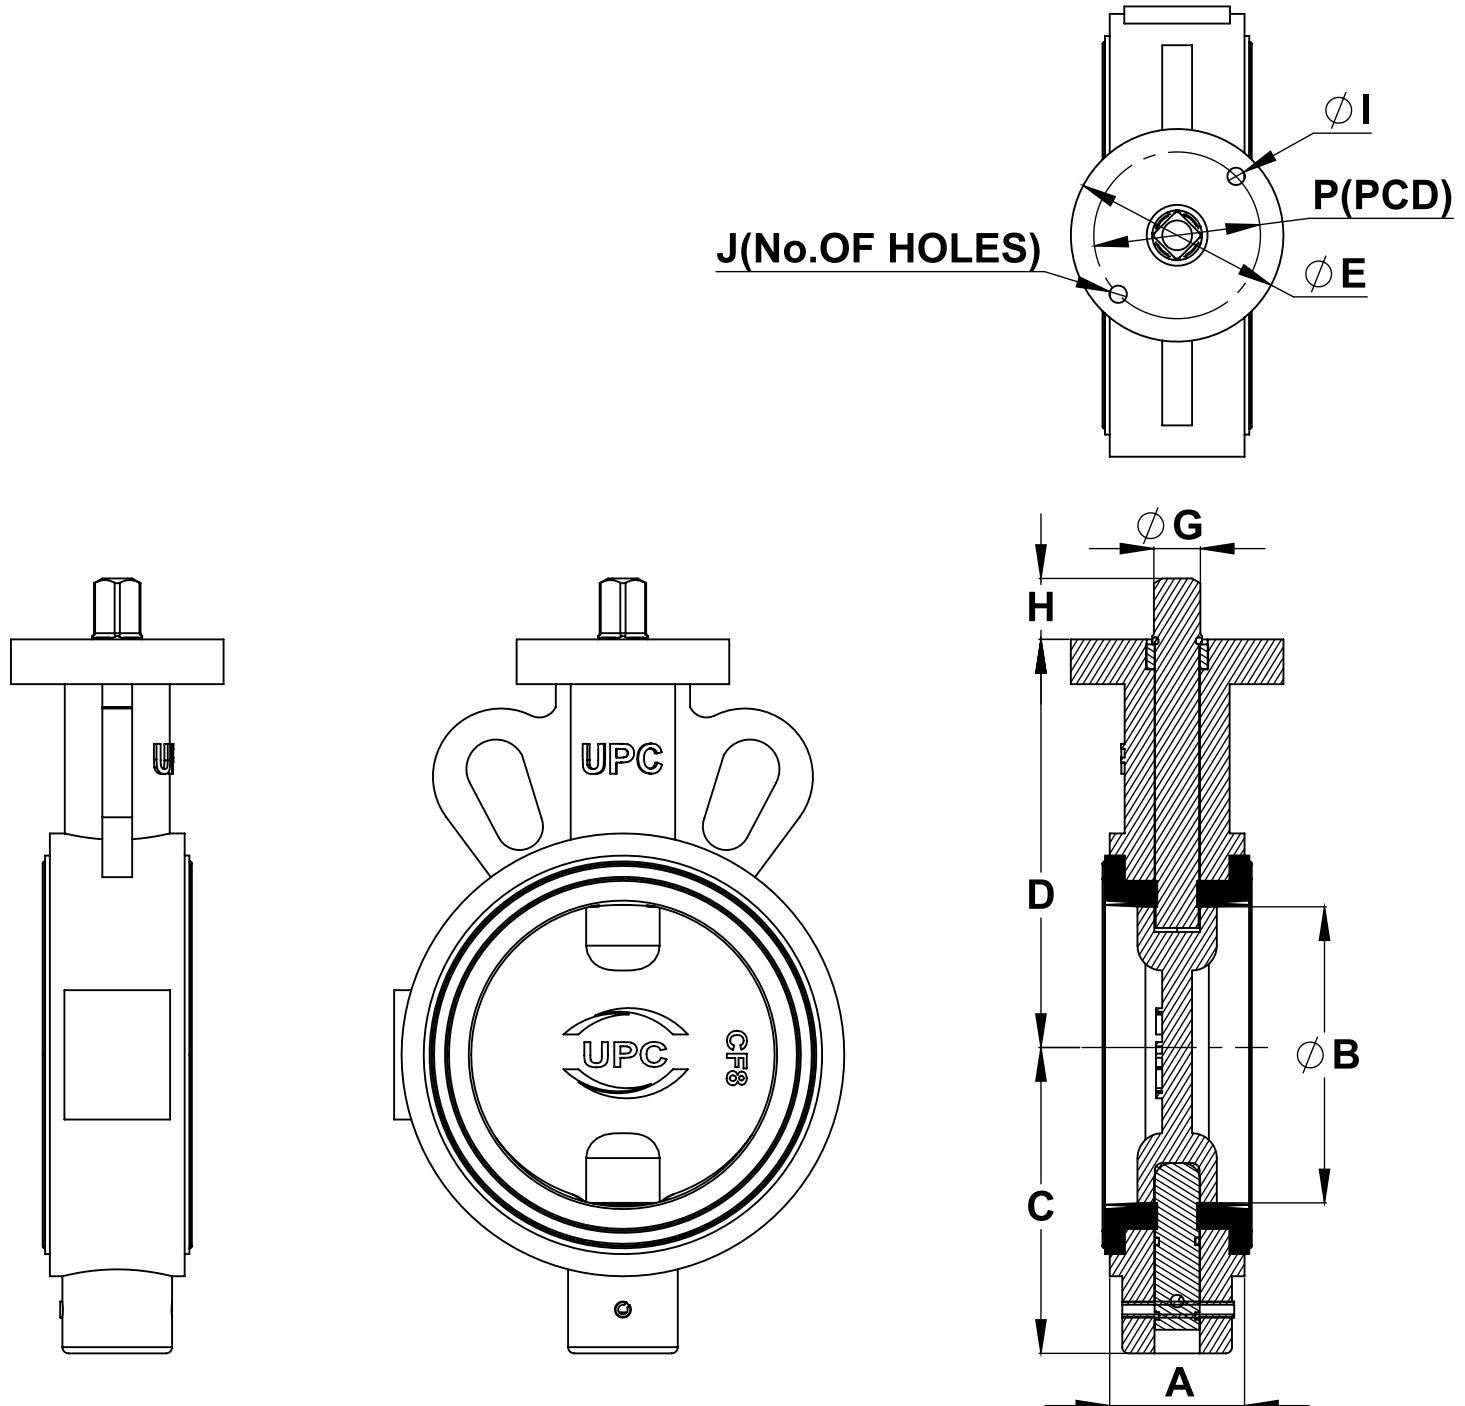


Diagram : UPC Butterfly Valve

ELECTRIC ACTUATOR BUTTERFLY VALVE



ORDERING INFORMATION

Body Material	Disc Material	Seat	Stem	Bush	Manual Operation	Modulated
1 - Cast Iron	1 - SS304	1 - EPDM	1 - SS410	1 - Steel	1 - 5-Position	+P1 - Pneumatic Single Acting Actuator
2 - SS304	2 - SS316	2 - Silicon	2 - SS304	2 - Bronze	2 - Gear Handwheel	+P2 - Pneumatic Double Acting Actuator
3 - Cast Steel	3 - SG Iron	3 - PTFE	3 - SS316	3 - PTFE		+M - Motorize(Electric) Actuator
						+S - SUV
						+L - Limit Switch
						+P3 - Pneumatic with MOR

(Example: 6"-in [150mm] Model - UPC-PBV-416 Butterfly Valve with Pneumatic Actuator with SUV & Limit Switch – 11113+P1+S+L)

VALVE PRESSURE RATING

RATING	SHELL(Kg/cm ²)	SEAT(Kg/cm ²)
PN-10	15.0	11.0
PN-16	24.0	17.6
PN-25	38	28

WARRANTY

All the valves are warranted against any manufacturing defect for a period of 12 months from date of supply, provided the valves has not been misused, damaged, installed for services it is not recommended or the seal has been tampered with. The company shall be liable to furnish part/ parts thereof or full Valve as the company may deem fit.



UPC INSTRUMENTS PVT.LTD.
AN ISO 9001:2015, 14001-2015 CE & TÜV SÜD CERTIFIED COMPANY



Office: Plot No. 18, Towel Market, Gohana Road, Panipat-132103 (HARYANA)

Manufacturing Unit: Plot no.125, Near Tehsil, Dinger Majra Road, Gharaunda, Karnal-132114 (HARYANA) INDIA

✉ : info@unitechmeter.com ✉ : ho@unitechmeter.com ✎ : www.unitechmeter.com

Due to continuous development program, design and data in this leaflet are subject to change without prior notice.

